

S&G® Model 2740 High Security Lock

Meets United States Federal Specification FF-L-2740A



Sargent and Greenleaf safe locks have been protecting the assets of banks, businesses and governments for more than 150 years. The S&G® 2740 lock represents the latest design advances to produce an electromechanical lock specifically engineered to secure GSA approved containers.

Features:

- Advanced electromechanical design that offers an exceptional level of security in an easy-to-operate safe lock.
- Familiar left-right-left dialing sequence, and one-handed operation for convenience.
- Twenty man-hours resistance to expert manipulation.
- Built in thermal protection provided by an integral thermal relock component.
- Simplified installation process significantly decreases installation time and reduces the likelihood of errors and damage to parts.

- Meets the stringent requirements of Federal Specification FF-L-2740A.
- Change key for quick, easy combination changing is included with each lock.
- Stainless steel lock bolt is strong enough to resist 600 lbs. of force.
- Single User and Dual Control modes of operation are selectable and changeable at any time.
- The lock case uses S&G's "Magic Module™" footprint and .461 inch bolt throw for ease of retrofit on existing containers.
- The use of internal batteries allows for a straightforward, robust lock design.
- The lock cover is retained on the lock whenever the bolt is retracted.

**Designed to the highest US Government
Standards for Combination Locks**

Model 2740 Electromechanical Combination Lock

Meets Federal Specification FF-L-2740A

Advanced electromechanical security. The S&G® 2740 lock is engineered and manufactured to meet the highest security standards of the US Government for the protection of classified materials.


Easy to install. The S&G® 2740 lock uses S&G's "Magic Module™" footprint to conform to the default industry standard for case size and mounting screw locations. This translates into easy installation on new containers and headache-free retrofits on existing units by eliminating the need for mounting plate or boltwork modifications. In addition, the 2740 has a bolt throw of .461 inch to accommodate the boltwork of some older GSA containers, and the lock bolt is even drilled and tapped to match most bolt extensions currently in use.

Spy-Proof® Dial. This security enhancing feature is standard with the S&G® 2740 lock. It restricts the area of the dial that can be viewed to a small band of numbers at the very top, making it extremely difficult for anyone other than the operator to view the numbers being dialed.

One-Handed Operation. Even with its enhanced security features, the Model 2740 is easy to operate. It uses the standard left-right-left dialing procedure common to most mechanical safe locks.

Rugged Construction. Federal Specification requires the lock bolt to withstand 600 pounds of force. The S&G® 2740 lock easily meets this figure to provide extra protection against brute force attacks.

The support of the industry leader. S&G is one of the world's largest manufacturers of high-security safe and vault locks, with one of the broadest arrays of locks available. Our safe locks are recognized as industry standards, unsurpassed in quality. We provide excellence in all areas—from our ISO 9001, UL®, and other worldwide certifications to our experienced customer service staff. We proudly stand behind all of our products with one of the best warranties in the industry.

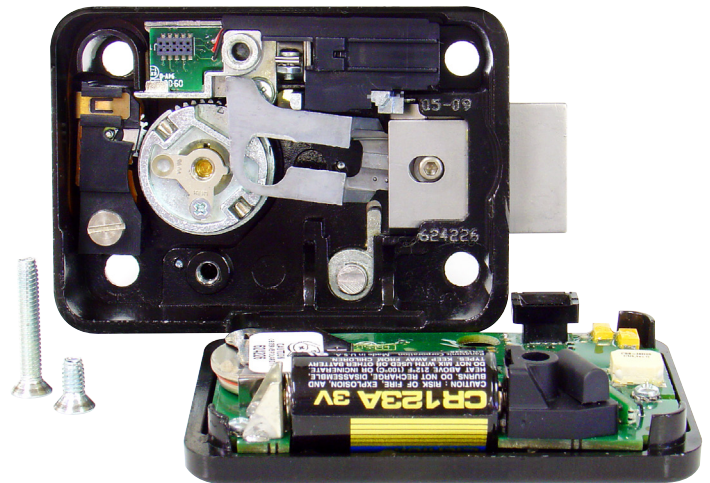

Advanced Electromechanical Design

Alignment, operating mode selection, and diagnostics are performed with the aid of a plug-in setup module. This simple tool incorporates an easy-to-read graphic interface that facilitates lock installation, setting the operating mode, and performing normal service operations.



www.sargentandgreenleaf.com
www.stanleysecuritysolutions.com

Corporate Headquarters: One Security Drive • Nicholasville, Kentucky 40356 • USA • Tel. 859-885-9411, Fax 859-887-2057
European Headquarters: 9, chemin du Croset • 1024 Ecublens • Switzerland • Tel. 41 21 694 34 00, Fax 41 21 694 34 09

Except as otherwise noted, all trademarks in this data sheet are trademarks of The Stanley Works in the U.S. and elsewhere.
® denotes a trademark registered in the U.S. Patent and Trademark Office. UL and UL in a circle are trademarks of Underwriters Laboratories.

Patents Pending.

© 2010 Sargent & Greenleaf, Inc.


STANLEY
SARGENT AND GREENLEAF®